


サーボ弁 性能表

分類	型式	定格圧力	定格流量 Pv=7MPa	周波数応答特性 - 90°位相遅れ点(±25%指令時)
DDV-EFB	D633	28 MPa	5 L/min	80 Hz
			10 L/min	80 Hz
			20 L/min	80 Hz
			40 L/min	80 Hz
	D634	35 MPa	60 L/min	65 Hz
			100 L/min	65 Hz
DDV	J841	21 MPa	10 L/min	200 Hz
			20 L/min	200 Hz
			30 L/min	200 Hz
			40 L/min	200 Hz
			60 L/min	200 Hz
			80 L/min	150 Hz
EFB-ServoJetパイロット弁	D661-G..A	35 MPa	20 L/min	120 Hz
			40 L/min	90 Hz
			80 L/min	90 Hz
			90 L/min	120 Hz
			120 L/min	80 Hz
			160 L/min	80 Hz
			200 L/min	80 Hz
	D661	35 MPa	80 L/min	60 Hz
			160 L/min	60 Hz
			200 L/min	60 Hz
	D662	35 MPa	400 L/min	50 Hz
			625 L/min	50 Hz
	D663	35 MPa	900 L/min	35 Hz
	D664	35 MPa	1,450 L/min	35 Hz
D665	35 MPa	2,500 L/min	25 Hz	
		3,800 L/min	25 Hz	
EFB-DDVパイロット弁	D681	35 MPa	80 L/min	82 Hz
			160 L/min	82 Hz
			200 L/min	82 Hz
	D682	35 MPa	400 L/min	72 Hz
			625 L/min	72 Hz
	D683	35 MPa	900 L/min	72 Hz
	D684	35 MPa	1,450 L/min	72 Hz
	D685	35 MPa	2,500 L/min	25 Hz
3,800 L/min			20 Hz	
MFB	G761/761	31.5 MPa	4 L/min	210 Hz ※
			10 L/min	210 Hz ※
			19 L/min	210 Hz ※
			38 L/min	180 Hz ※
			63 L/min	100 Hz ※
	J072/072	21 MPa	95 L/min	80 Hz ※
			152 L/min	70 Hz ※
			228 L/min	50 Hz ※
	G631/631	31.5 MPa	5 L/min	65 Hz
			10 L/min	65 Hz
			20 L/min	65 Hz
			40 L/min	65 Hz
			60 L/min	65 Hz
			75 L/min	65 Hz
	J869	21 MPa	3 L/min	70 Hz
			5 L/min	70 Hz
			11 L/min	70 Hz
			21 L/min	70 Hz
32 L/min			70 Hz	
42 L/min			70 Hz	
64 L/min			70 Hz	
3段MFBパイロット弁	J079-100	35 MPa	114 L/min	90 Hz ※
			228 L/min	60 Hz ※
	J079-200	35 MPa	760 L/min	80 Hz
	J790-200	25 MPa	1,300 L/min	60 Hz ※
	J790-400	25 MPa	2,000 L/min	50 Hz ※
	J790-600	25 MPa	3,500 L/min	45 Hz ※

※ ±40%指令時

サーボ弁制御条件

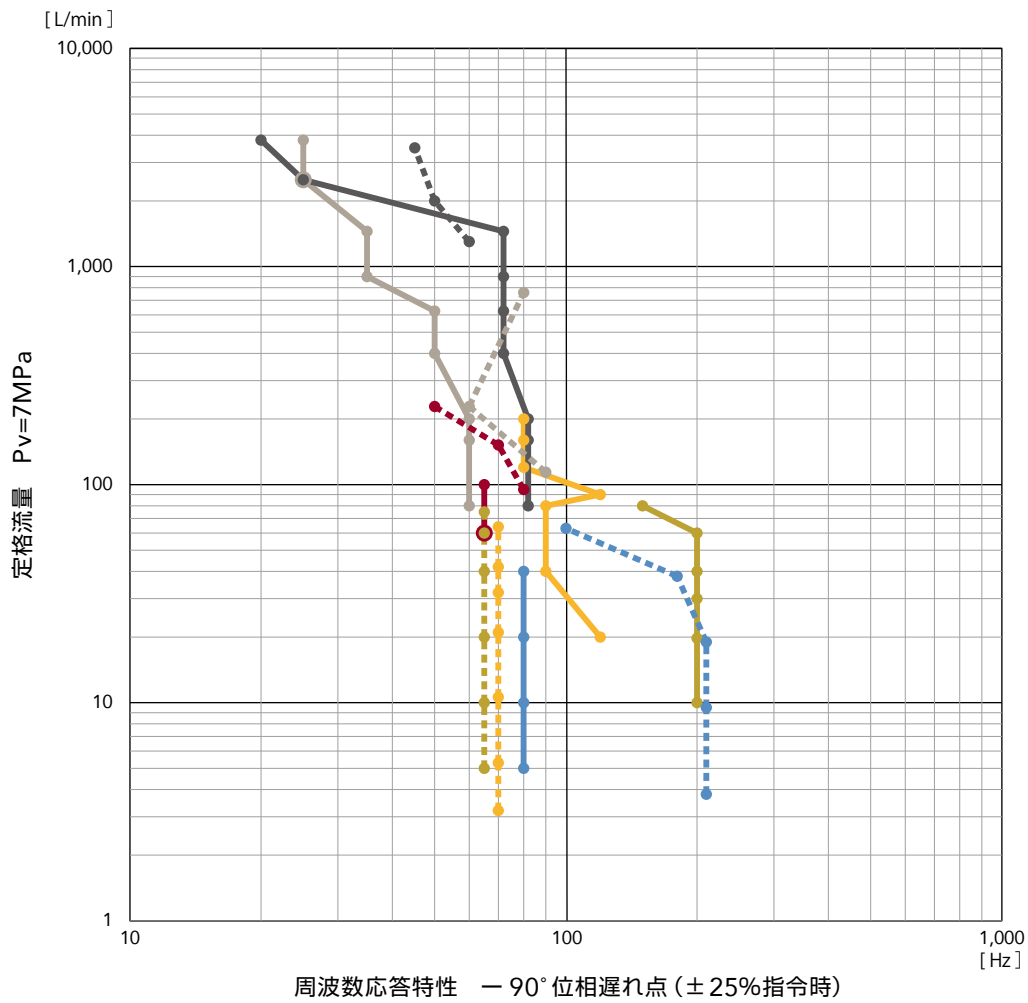

- | | |
|--------------------------------|----------------------------------|
| — D633 | --- G761 / 761 |
| — D634 | --- J072 / 072 |
| — J841 | --- G631 / 631 |
| — D661-G..A | --- J869 |
| — D661, D662, D663, D664, D665 | --- J079-100, J079-200 |
| — D681, D682, D683, D684, D685 | --- J790-200, J790-400, J790-600 |

製品一覧



D633



D634



J841



D661-G..A



D661, D662, D663, D664, D665



D681, D682, D683, D684, D685



G761 / 761



J072 / 072



G631 / 631



J869



J079-100, J079-200



J790-200, J790-400, J790-600